

HD4004M2

1. USE

Rocker, axial or style control device for lighting and other control.

2. RANGE

AXIAL SWITCHES

Designation	Terminals	
	With screws	
	1 module	2 modules
4-way switch 1 P 16 AX 250 VAC	HD4004 HC4004 HS4004	HD4004M2 HC4004/2 HS4004/2

STYLE SWITCHES

Designation	With screws	
	1 module	2 modules
4-way switch 1 P 16 AX 250 VAC	HZ4004 HX4004 HY4004	HZ4004M2 HX4004/2 HY4004/2


ROCKER SWITCHES

Designation	With screws	
	1 module	2 modules
4-way switch 1 P 16 AX 250 VAC	HD4054 HC4054 HS4054	HD4054M2 HC4054/2 HS4054/2

Color code:

- White
- Tech
- Anthracite

3. OVERALL DIMENSIONS (mm)

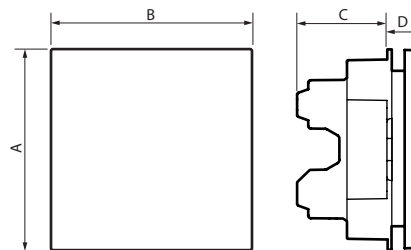

Axial	A	B	C	D
1 module	45	22.5	34	9.5
2 modules	45	45	31	9.5

Style	A	B	C	D
1 module	45	22.5	34	9.5
2 modules	45	45	31	9.5

Rocker	A	B	C	D
1 module	45	22.5	25.5	9.5
2 modules	45	45	25.5	9.5

4. CONNECTION

Stripping length (rigid or flexible cables): 9 mm screw terminals

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate for mechanism case
PC for key cover
Colour: White, Tech, Anthracite
Halogen free.
UV resistant.
Self-extinguishing:
- 850° C / 30 s for insulating parts holding live parts in place.
- 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 VAC
Current: 16 AX

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e.catalogue.