


HD4027M2



HD4028H

1. USE

Changeover switches range: basic control device. For lighting and other controls.


2. RANGE

CHANGEOVER SWITCHES 16 A		Cat. No.
	Changeover switch 1 P - 16 A - 250 Vac Double pushbutton 1-0-2	<input type="checkbox"/> HD4027 <input type="checkbox"/> HC4027 <input checked="" type="checkbox"/> HS4027
	1 P - 16 A changeover switch for 2 speed fan control Double key: speed 1-0-speed 2	<input type="checkbox"/> HD4027VMC <input type="checkbox"/> HC4027VMC <input checked="" type="checkbox"/> HS4027VMC
	Changeover with 1 P - 16 A - 250 Vac Double pushbutton 1-0-2	<input type="checkbox"/> HD4027M2 <input type="checkbox"/> HC4027/2 <input checked="" type="checkbox"/> HS4027/2
	Changeover with 1 P - 16 A - 250 Vac Double pushbutton 1-0-2 for hotel installation Room condition indication: «please do not disturb» and «please clean the room». To use with pilot light item H4372V230H.	<input type="checkbox"/> HD4028H <input type="checkbox"/> HC4028H <input checked="" type="checkbox"/> HS4028H

Color code:

- White
- Tech
- Anthracite

3. OVERALL DIMENSIONS (mm)

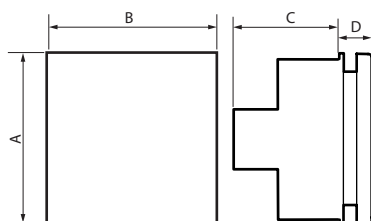

	A	B	C	D
1 module	45	22.5	33	9.5
2 modules	45	45	33	9.5

4. CONNECTION

Stripping length (rigid or flexible cables): 12 mm for screwless terminals
9 mm for screw terminals

5. TECHNICAL CHARACTERISTICS

■ **5.1 Protection index**

Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ **5.2 Material characteristics**

Material: Polycarbonate for mechanism case
PC for key cover
Colour: Anthracite, White, Tech
Halogen free.
UV resistant.

Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

■ **5.3 Electrical characteristics**

Voltage: 250 VAC
Current: 16 A

■ **5.4 Climatic characteristics**

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e. catalogue.