




HD/HC/HS4292



HD/HC/HS4282

1. USE

Devices for current audio-video and other networks.


2. RANGE

NEW AUDIO-VIDEO SOCKETS		Cat. No.
	Audio socket - jack 3.5	□ HD4280 ■ HC4280 ■ HS4280
	Audio socket - RCA x 2	□ HD4281 ■ HC4281 ■ HS4281
	Connector for home cinema loudspeakers	□ HD4294 ■ HC4294 ■ HS44294
	5 pole DIN connector for hi-fi and similar devices - to weld	□ HD4292 ■ HC4292 ■ HS4292
	Video socket - HD15	□ HD4282 ■ HC4282 ■ HS4282
	RCA x 3	□ HD4283 ■ HC4283 ■ HS4283
OTHER SOCKETS		
	Mini socket 2P - Contact tubes Ø 3 mm Center line of holes 13 mm - For auxiliary and similar circuits - 6 A - 24 V - SELV Terminal connection for plug 2120.	□ HD4291 ■ HC4291 ■ HS4291
	2 pole DIN connector - to weld	□ HD4293 ■ HC4293 ■ HS4293
	HDMI socket	□ HD4284 ■ HC4284 ■ HS4284
	USB socket	□ HD4285 ■ HC4285 ■ HS4285

Color code:

□ White ■ Tech ■ Anthracite ○ Neutral

3. OVERALL DIMENSIONS (mm)

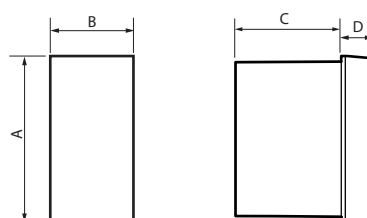

References	A	B	C	D
HD/HC/HS4280	45	22.5	20.85	9.5
HD/HC/HS4281	45	22.5	20.85	15
HD/HC/HS4282	45	45	11.7	15
HD/HC/HS4283	45	45	11.7	15
HD/HC/HS4284	45	45	11.7	14
HD/HC/HS4285	45	22.5	20.85	10
HD/HC/HS4291	45	22.5	29	9.5
HD/HC/HS4292	45	22.5	12	9.5
HD/HC/HS4293	45	22.5	12	9.5
HD/HC/HS4294	45	22.5	20	15

4. CONNECTION

Stripping length (rigid or flexible cables): 12 mm for screwless terminals depending of the items numbers.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate for mechanism case
PC for key cover
Colour: Anthracite, White, Tech
Halogen free.
UV resistant.
Self-extinguishing:
+ 850° C / 30 s for insulating parts holding live parts in place.
+ 650° C / 30 s for other parts made of insulating materials

■ 5.3 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e. catalogue.