


## AXOLUTE Relays

Cat. No(s): HD4331V230 - HC4331/230 - HS4331/230 - HD4332V230 - HC4332/230 - HS4332/230  
HD4330V230 - HC4330/230 - HS4330/230 - HD4330V24 - HC4330/24 - HS4330/24  
HD4330V12 - HC4330/12 - HS4330/12



HD4331V230

### 1. USE

Electronic step relays and monostable relays range.

### 2. RANGE

#### ELECTRONIC STEP RELAYS

	Cyclic relay, switch 10 AX - 250 Vac - 3 wires	<input type="checkbox"/> HD4331V230 <input checked="" type="checkbox"/> HC4331/230 <input checked="" type="checkbox"/> HS4331/230
	Cyclic relay, switch 10 AX - 250 Vac - 3/4 wires	<input type="checkbox"/> HD4332V230 <input checked="" type="checkbox"/> HC4332/230 <input checked="" type="checkbox"/> HS4332/230


#### MONOSTABLE RELAYS

	Monostable relay with NO/NC contact - 250 Vac 10 A (resistive) - 4 A (inductive coil power supply) 230 Vac	<input type="checkbox"/> HD4330V230 <input checked="" type="checkbox"/> HC4330/230 <input checked="" type="checkbox"/> HS4330/230
	as above - coil power supply 24 Vac	<input type="checkbox"/> HD4330V24 <input checked="" type="checkbox"/> HC4330/24 <input checked="" type="checkbox"/> HS4330/24
	as above - coil power supply 12 Vac	<input type="checkbox"/> HD4330V12 <input checked="" type="checkbox"/> HC4330/12 <input checked="" type="checkbox"/> HS4330/12

#### Color code:

- ☐ White
- ☒ Tech
- ☒ Anthracite

### 3. OVERALL DIMENSIONS (mm)

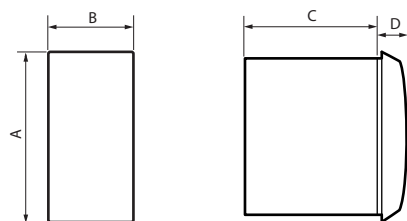

Rocker	A	B	C	D
1 module	45	22.5	19	9.5

### 4. CONNECTION

Stripping length (rigid or flexible cables): 12 mm

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D  
Impact test: IK 04

#### ■ 5.2 Material characteristics

Material: Polycarbonate for mechanism case  
PC for key cover  
Colour: White, Tech, Anthracite  
Halogen free.  
UV resistant.  
Self-extinguishing:  
+ 850° C / 30 s for insulating parts holding live parts in place.  
+ 650° C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

### 6. CLEANING

Surface cleaning with a cloth.  
Do not use: acetone, tar remover, trichloroethylene.

### 7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
Refer to e.catalogue.