


DATENBLATT

N 5020 COB LED


LED Möbeleinbauleuchte, COB LED



Flache LED Möbeleinbauleuchte mit satiniertem, hitzebeständigem Schutzglas und geringer Einbautiefe.




Technische Daten	Möbeleinbauleuchte				
Bezeichnung	N 5020 COB LED				
Artikel Nr.	1850208402	1850208479	1850208409	1850208418	1850208410
Farbe	chrom	gold	nickel-gebürstet	schwarz	weiß
Oberfläche	galvanisiert	galvanisiert	galvanisiert	lackiert	lackiert
Lichtfarbe	warmweiß				
Farbtemperatur	ca. 3000 K				
Leuchtmittel	COB LED				
Ausstrahlwinkel	86°				
Nennspannung	max. 9,5V				
Nennstrom	350mA Konstantstrom				
Nennleistung	3,3W				
Material	Stahl/Kunststoff/Glas satiniert				
Lichtstrom	ca. 177 lm				
Energieeffizienzklasse	A++ bis A				
Farbwiedergabe	Ra >90				
Abmessungen (ØxH)	66x18 mm				
Deckenausschnitt (Ø)	58 mm				
Einbautiefe	18 mm				
Gewicht	46 g				
Leuchtenanschluss	30 cm Anschlussleitung mit AMP-Stecksystem 2-polig				
Einbauhinweis	geeignet zur direkten Montage an normal entflammaren Materialien				
Betriebsgerätempfehlung	EL-350mA Serie				

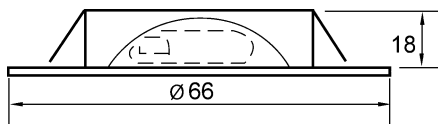

Zubehör (optional): **R 5020 Aufbauring**

Artikel Nr.	Bezeichnung
1850290200	R 5020 Aufbauring chrom
1850290900	R 5020 Aufbauring nickel-gebürstet
1850291000	R 5050 Aufbauring weiß
1850291800	R 5020 Aufbauring schwarz
1850297900	R 5020 Aufbauring gold

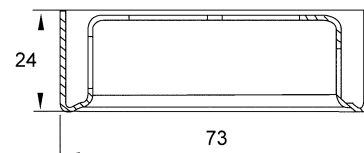

Technische und gestalterische Änderungen im Zuge stetiger Produktentwicklungen vorbehalten.


DATA SHEET

N 5020 COB LED


LED Downlight, COB LED



Flat LED Downlight for furniture use with satined, heat resistant cover glass and a narrow installation depth.




Specifications	LED Downlight for furniture use				
Type	N 5020 COB LED				
Part no.	1850208402	1850208479	1850208409	1850208418	1850208410
Colour	chrome	gold	brushed nickel	black	white
Surface	galvanized	galvanized	galvanized	painted	painted
Light colour	warm white				
Colour temperature	ca. 3000 K				
Light source	COB LED				
Beam angle	86°				
Rated voltage	max. 9.5V				
Rated current	350mA constant current				
Rated power	3.3W				
Material	steel/synthetic material/glass satined				
Luminous flux	ca. 177 lm				
Energy efficiency class	A++ to A				
Colour rendering	Ra >90				
Dimensions (ØxH)	66x18 mm				
Ceiling cut-out (Ø)	58 mm				
Installation depth	18 mm				
Weight	46 g				
Connection of luminaire	30 cm connecting cable with AMP plug-system 2-pole				
Installation note	suitable for direct mounting on normal flammable surfaces				
Recommendation LED driver	EL-350mA series				

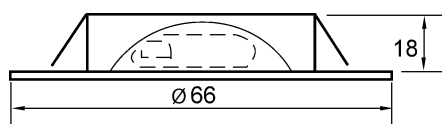

Accessories (optional): **R 5020 Surface mounted housing**

Part no.	Type
1850290200	R 5020 Surface mounted housing chrome
1850290900	R 5020 Surface mounted housing brushed nickel
1850291000	R 5050 Surface mounted housing white
1850291800	R 5020 Surface mounted housing black
1850297900	R 5020 Surface mounted housing gold

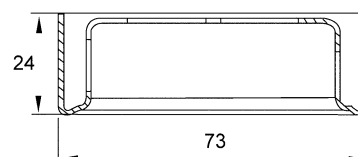

Technical and design changes due to product developments are subject to change without prior notice.